AIPHONE

Simple Operation. Slim, Stylish Design.



JSS-1A
3.5-INCH
VIDEO INTERCOM



DOOR RELEASE

Allows you to release door entry and access control.



IP 54 DUST & WEATHER RESISTANT

Protected from dust ingress, and water spray.



SUB MASTER STATION

Provides a second on-site location to answer calls from your video door station.

Simple And Reliable Video Intercom for Your Life.







Suitable for










System Configuration

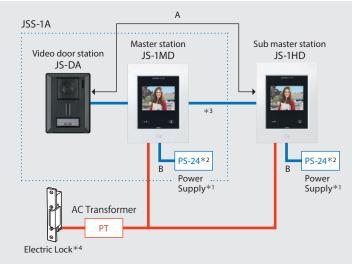

Wiring distance

	Ø 0.65 mm	Ø 0.8-1.2 mm
A	50 m	100 m
В	5 m	10 m


- *1 If the distance between the master station (or sub master station) and the power supply is within 10m using ø0.8mm cable, sharing of power supply is possible.
- *2 PS-24: PS-2420, PS-2420S, PS-2420UL, PS-2420BF, PS-2420DM
- ${st}{3}$ Master station and sub master station cannot intercommunicate.
- *4 An EL-125 (12V AC, 0.125A, 12V DC, 0.2A) or equivalent part and a separate AC transformer (or power supply) are required. Door release contact: 24V AC/DC, 1A (Minimum contact: 100mV DC, 0.1mA) (N/O dry closure contact L, L).
 - * Run separate cables for audio/video and door release.

Specifications

Video door station (JS-DA)		
Power supply	Supplied from master station	
Camera	Complementary metal oxide semiconductor (CMOS)	
Dimensions	129 (H) × 97 (W) × 35 (D) mm	
Weight	Approx. 200g	
Water/dust protection class	IP54	

Master station (JS-1MD), Sub master station (JS-1HD)		
Power supply	24V DC	
Display	3.5 inch TFT color LCD monitor	
Dimensions	169 (H) × 129 (W) × 28 (D) mm	
Weight	Approx. 320g (JS-1MD) Approx. 310g (JS-1HD)	

Unit Dimensions



Distributed by:



T.0999461552 / 0999461554 2264330





Deming Medal



Corresponding product: Standard product Order product AIPHONE CO., LTD.





JQA-EM0453
: HEADQUARTERS
TOYOTA FACTORY
TAIHOH SITE
DEVELOPMENT CENTER
AIPHONE CO.,LTD.



https://www.aiphone.ec/